

Window camera

USER MANUAL

*Myers*TM

Content

1. Device description	3
1.1 Camera description.....	3
2. Installing the app and adding a device	3
2.1 Installing the application	3
2.2 Adding a device — Wireless Connect mode.....	3
2.3 Adding a device by scanning a QR code	5
3. Features and settings	6
3.1 Entering Settings and the Home Screen.....	6
3.2 Support	9
4. Device settings.....	10
4.1 Connection settings	10
4.2 Device settings.....	11
4.3 Alarms.....	11
4.4 Storage.....	14
4.5 Video settings	15
4.7 Shared access.....	16
4.8 Firmware update	16
4.9 Delete device	17

Thank you for choosing our smart camera!

1. Device description

1.1 Camera description

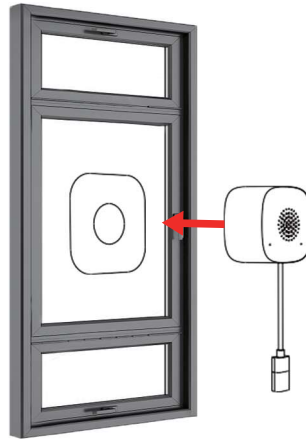


Fig.1.1

Component Description:

Reset Button: Long press "reset" hole 5sec, reset success.

It is recommended to insert 8-256GB high-speed Micro TF card, otherwise it will not be able to store view historical video and support Important functions such as firmware upgrading.

2. Installing the app and adding a device

2.1 Installing the application

1. Download the Partizan app from Play Market or AppStore or scan the QR code on the box.
2. Open the Partizan app, register, or log in to your account by following the app's prompts.

2.2 Adding a device — Wireless Connect mode

1. Make sure you have access to stable Wi-Fi with Internet access.
2. Connect the camera to power and wait for startup to complete.
3. Open the app click "+" in the bottom right corner.
4. Choose:
Add device → Wireless Connect → Cameras → Another cameras → Window WiFi Camera

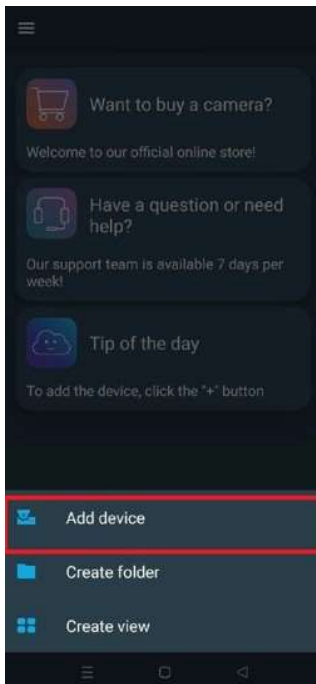


Fig.2.2.1

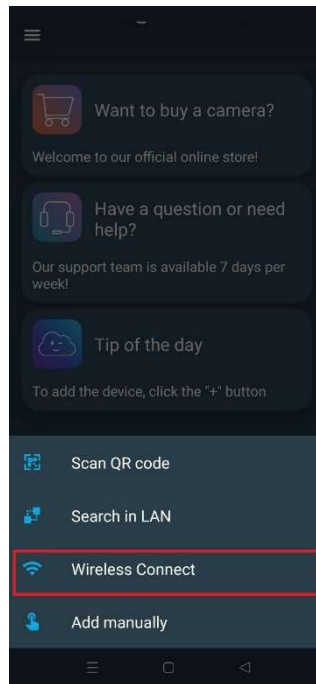


Fig.2.2.2



Fig.2.2.3

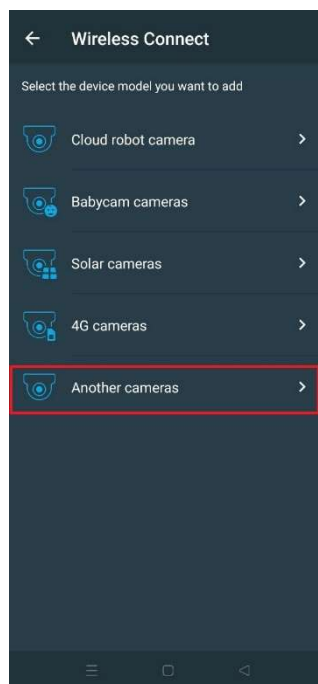


Fig.2.2.4

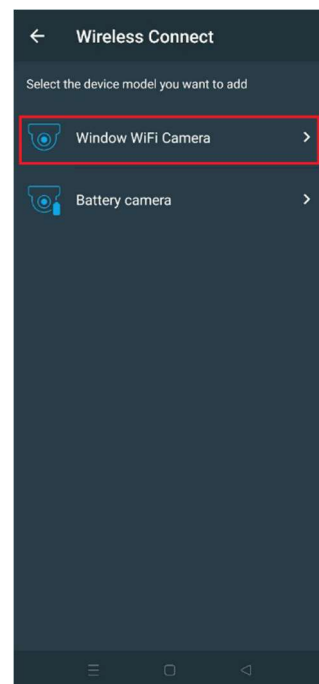


Fig.2.2.5

5. The camera supports 2.4 GHz Wi-Fi only.
6. If your phone is not connected to Wi-Fi, connect to your Wi-Fi network by entering its name and password.
7. Then follow the app's prompts..
8. Specify the name of your new device and, optionally, a folder.



Fig.2.2.6

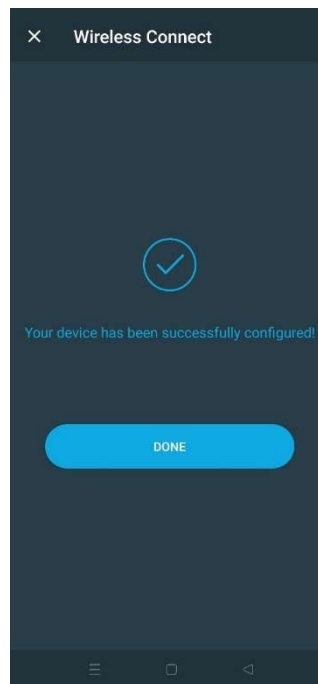


Fig.2.2.7

9. Once the setup is complete, click "Done."
10. A list of your devices will open. Clicking on the name of your new device will open a preview window.

2.3 Adding a device by scanning a QR code

1. Connect the camera to power and wait for startup to complete.
2. Scan the QR code on your device packaging and follow the link.
3. Follow the app's prompts and choose your cloud account.



Fig.2.3.1

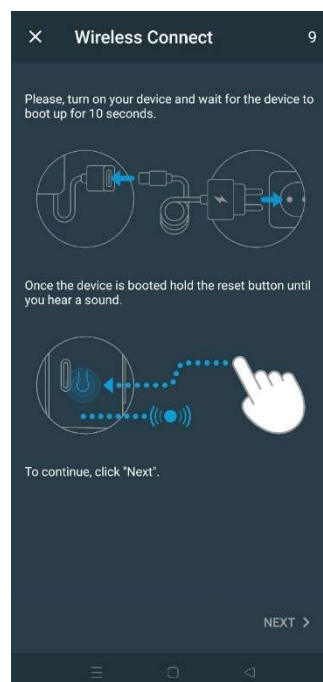


Fig.2.3.2

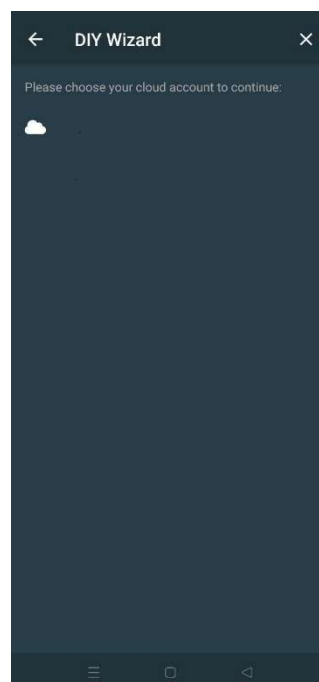


Fig.2.3.3

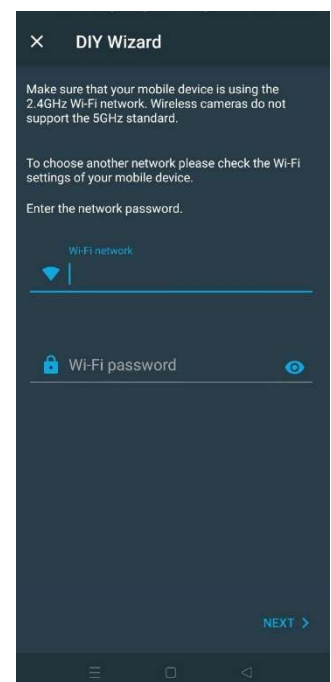


Fig.2.3.4

If your phone is not connected to Wi-Fi, connect to your Wi-Fi network by entering its name and password (**Only 2.4 GHz** Wi-Fi is supported).

4. The following actions are completely identical to points 7, 8, 9 and 10 of the previous section.

3. Features and settings

3.1 Entering Settings and the Home Screen

Open the Partizan app and find your device in the section **Cloud account**, specifying the name of your cloud account.

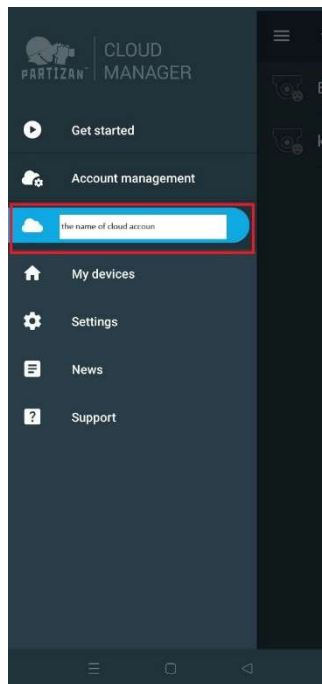


Fig.3.1.1

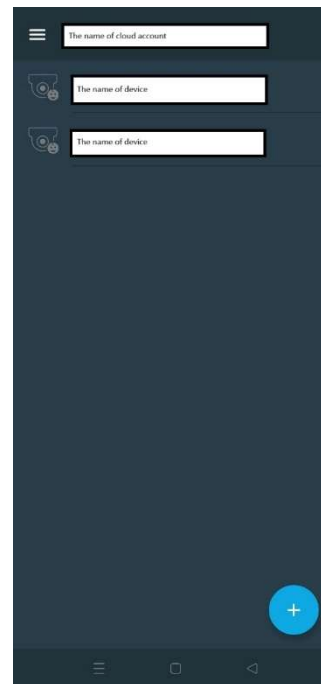


Fig.3.1.2

Clicking on the line with the name of your device will take you to the home screen.

Home screen

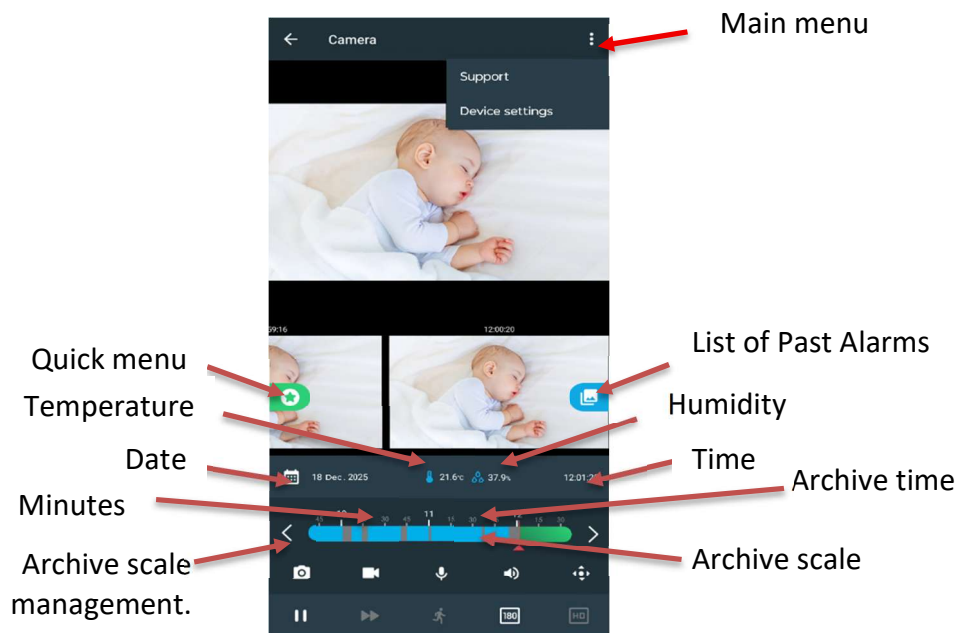


Fig.3.1.3

- ◆ In the archive timeline, alarms are marked in blue.

Home screen icons:



ability to take a photo with the camera



ability to record video from the camera



the feature allows you to stream audio from the app directly to the camera. The user can speak into the phone and the sound will be played through the camera speaker.



the camera will transmit sound from the microphone to the app.



control the position and zoom of the image from the camera



pause



accelerated archive playback



changing the type of alarms displayed on the scale



number of minutes on the archive scale



switching between Mainstream and Substream



This device may not support some features

Quick menu

With the Quick Menu, users can easily and quickly turn certain camera functions on or off using icons.

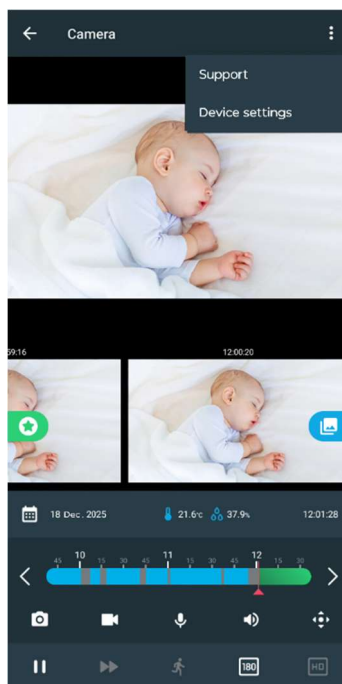


Fig.3.1.4



- turn the camera light on or off



- turn on or off lullaby



- enable or disable private mode



- enable or disable the alarm sound



This device may not support some features

List of Past Alarms

By clicking on List of past alarms, you can see the list and time of alarms that have occurred previously.

By clicking the three dots in the upper right corner, you can contact Support or enter Camera Settings.

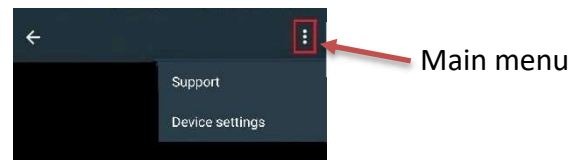


Fig.3.1.5

3.2 Support

By selecting the Support menu item, you can contact the technical support service using WhatsApp, Viber, or Telegram messengers.

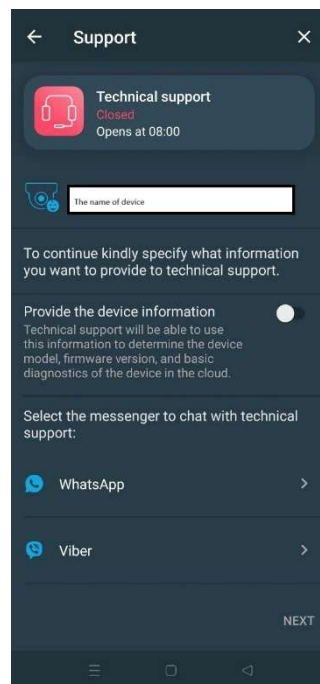


Fig.3.2

4. Device settings

In the Device Settings section, you can configure the device for comfortable and useful use.

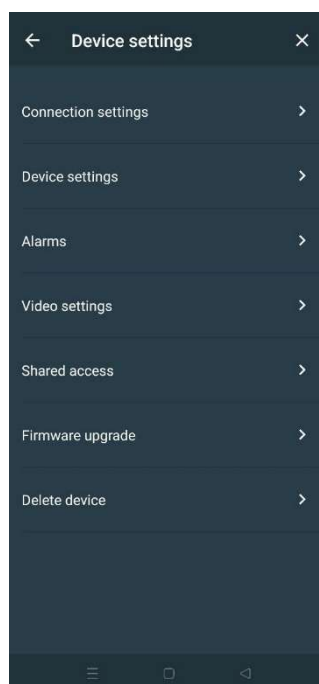


Fig.4

4.1 Connection settings

In the Connection Settings menu section, you can change the device name or move it to a folder.

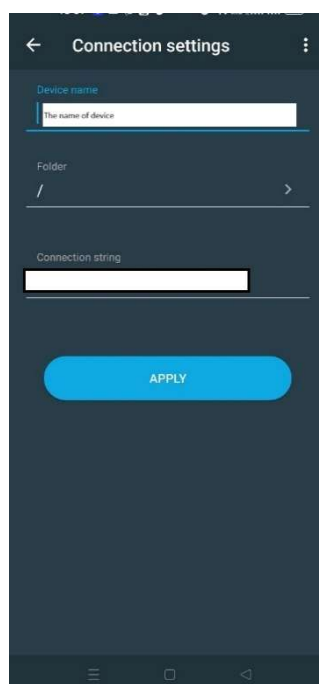


Fig.4.1

4.2 Device settings

The Device Settings feature allows you to enable or disable the Button/Status Backlight. When active, the light sensor is highlighted in blue.

4.3 Alarms

In the Alarms section, you can set conditions that, if violated, will send a message to the smartphone connected to the device.

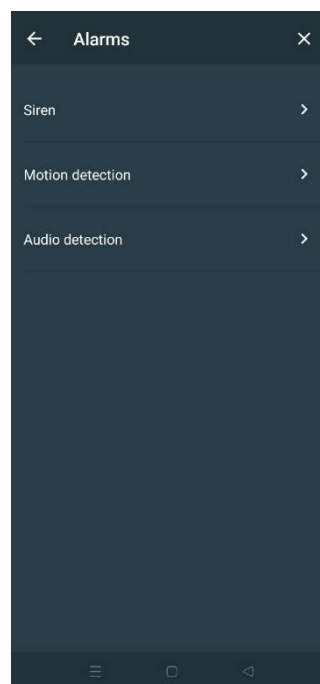


Fig.4.3.1

Siren

In this section you can adjust the Volume and Duration of the siren

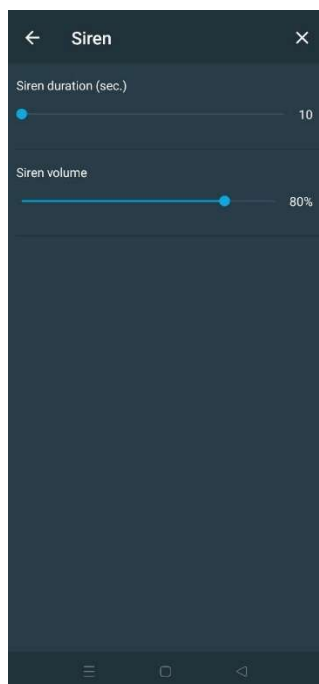


Fig.4.3.2

Motion detection

Motion sensitivity: In the Motion Sensitivity function, you can set the motion detection sensitivity: Low, Medium or High.

Human detection filter: If the function is activated, the camera will only send notifications when people are detected in the surveillance area.

Motion detection notification: If the feature is activated, the camera will only send notifications when motion is detected in the surveillance area.

Car detector: If the function is activated, the camera will send a notification when a car is detected in the surveillance area.

Motion detection siren: If the function is activated, the camera will turn on the siren when motion is detected.

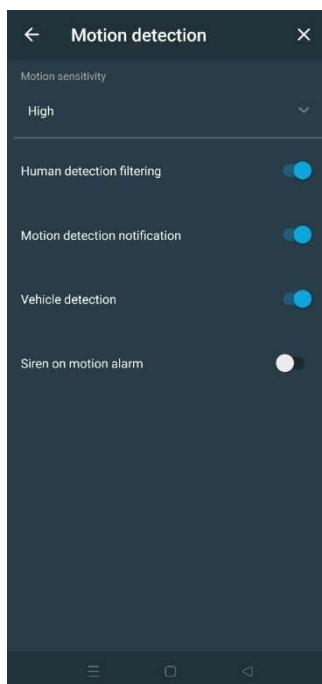


Fig.4.3.2

Audio detection

Audio detection: If the function is activated, the camera will only send notifications when sound is detected in the surveillance area.

Sensitivity: In the Sensitivity function, it is possible to set the sound detection sensitivity: Lower or Higher

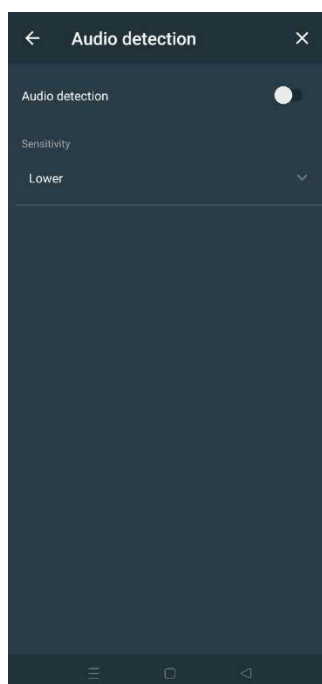


Fig.4.3.2

4.4 Storage

In the Storage section, you can check the total capacity of the memory card, the amount of free space, and, if necessary, format it.

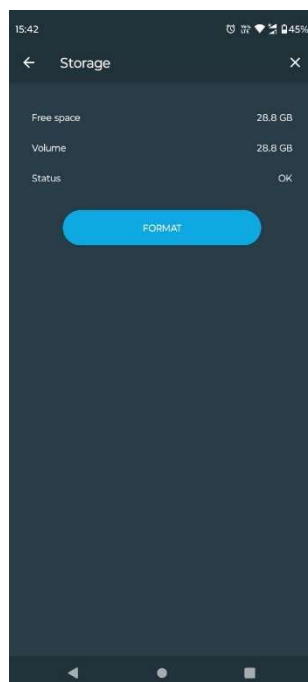


Fig.4.4

4.5 Video settings

In the Video Settings section, you can flip the image, enable the time display function on the video, use wide dynamic range.

Flip image - the image will be rotated 180°

Display time on video - The time and date will be displayed on the video

Wide dynamic range - the sensor will simultaneously reproduce details in the brightest and darkest areas of the frame.

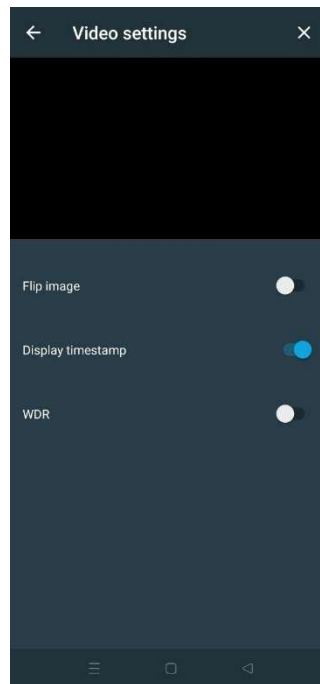


Fig.4.5

4.7 Shared access

Using the Shared access, you can grant access to the device to another user of the Partizan application.

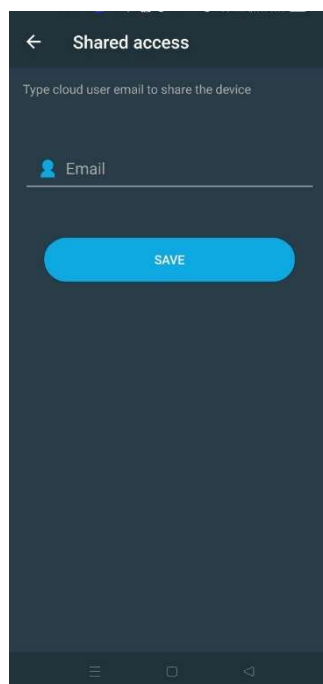


Fig.4.7

4.8 Firmware update

Our team is constantly working to improve the functionality of our products. You can update the firmware of your device in the Firmware Update section.



Fig.4.8

4.9 Delete device

If you need to remove a device, you can do so in the Remove device section.

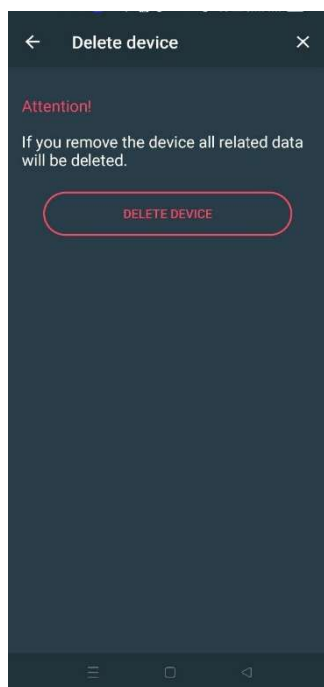


Fig.4.9.1

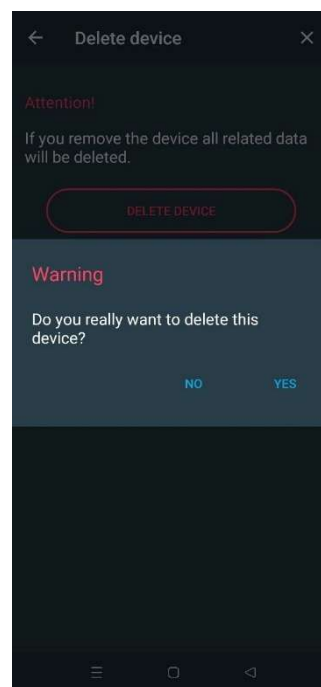


Fig.4.9.2